

Diamond Mini Square RL-DIAMOND-22-SS

Recessed Light

Product Finishes: ■ ■





Specifications:

Voltage: 12V AC
Wattage: 0.1
Volt Amps: 0.15
Lumens: 2
Color Temp: 2700k
IP Rating: 67
CRI: 93
Light Source: Integrated

Material: Polycarbonate
Ring Material: Stainless steel
Cable Length: 36"
Lux (lx): 1.2 lx
Candelas (cd): 1 cd
Rated Life: 50,000 hours
Warranty: 7-year comprehensive
Dimmable: No
Color-Changing: No

Product Uses:
 Pavers, Decks, Stairs,
 Driveways, Risers, Concrete

Accessories:
 Fang Mini

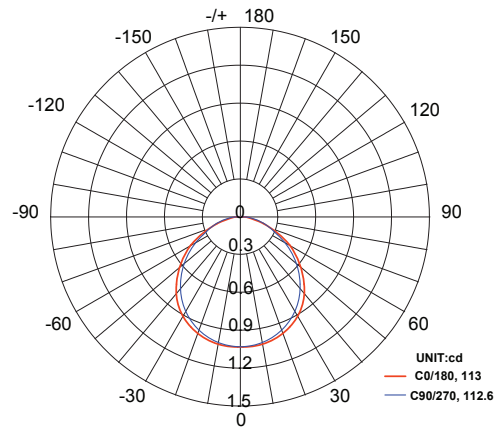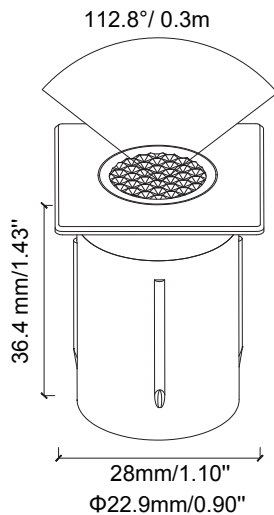

AVERAGE BEAM ANGLE (50%): 112.8 DEG

Max. Luminous intensity : 1 cd

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
0.25	2.20/7.29		0.075
0.5	0.55/1.82		0.15
1	0.32/1.08		0.30
1.25	0.17/0.57		0.375
1.5	0.11/0.35		0.45
3	0.03/0.09		0.87

