

# Onyx Hex RL-ONYX-HX-60-BK

Recessed Light

Product Finishes: ■ ■





## Specifications:

**Voltage:** 12V AC  
**Wattage:** 3  
**Volt Amps:** 4.5  
**Lumens:** 200  
**Color Temp:** 2700k  
**IP Rating:** 67  
**CRI:** 92.5  
**Light Source:** Integrated

**Material:** Polycarbonate  
**Ring Material:** Anodized aluminum  
**Cable Length:** 36"  
**Lux (lx):** 5.1 lx  
**Candelas (cd):** 191 cd  
**Rated Life:** 50,000 hours  
**Warranty:** 7-year comprehensive  
**Dimmable:** No  
**Color-Changing:** No

**Product Uses:**  
 Pavers, Concrete, Walls,  
 Fences, Retaining Walls

**Accessories:**  
 Fang

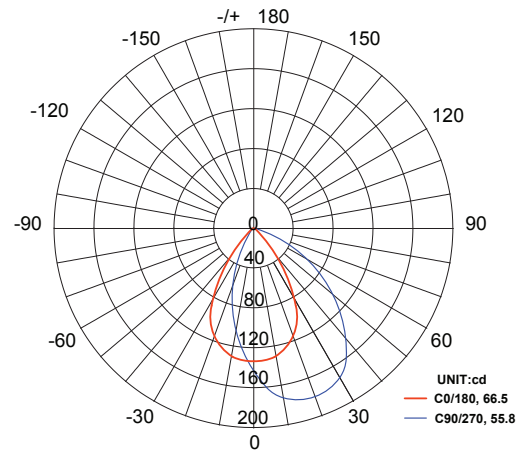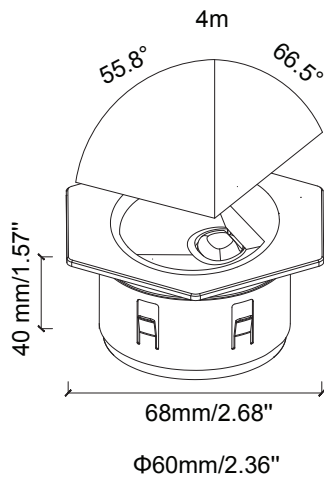

**AVERAGE BEAM ANGLE (50%): 61.1 DEG**

Max. Luminous intensity : 191 cd

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
3.25	7.70/14.65		3.48
6.25	1.92/3.66		6.96
10	0.88/1.67		10.70
13	0.48/0.91		13.91
16.5	0.31/0.59		17.62
20	0.22/0.42		21.40

