

Onyx Hex RL-ONYX-HX-60-SS

Recessed Light

Product Finishes: ■ ■





Specifications:

Voltage: 12V AC
Wattage: 3
Volt Amps: 4.5
Lumens: 200
Color Temp: 2700k
IP Rating: 67
CRI: 92.5
Light Source: Integrated

Material: Polycarbonate
Ring Material: Stainless steel
Cable Length: 36"
Lux (lx): 5.1 lx
Candelas (cd): 191 cd
Rated Life: 50,000 hours
Warranty: 7-year comprehensive
Dimmable: No
Color-Changing: No

Product Uses:
 Pavers, Concrete, Walls,
 Fences, Retaining Walls

Accessories:
 Fang

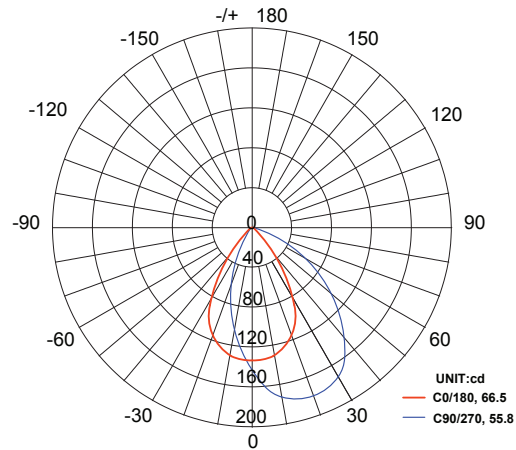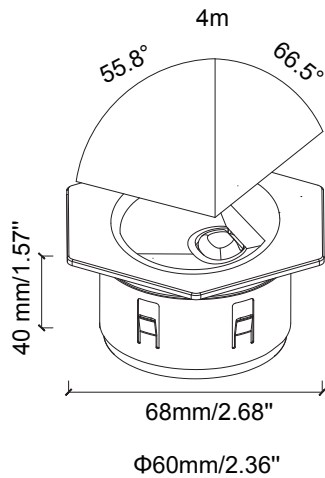

AVERAGE BEAM ANGLE (50%): 61.1 DEG

Max. Luminous intensity : 191 cd

| DISTANCE (FT) | CENTER BEAM (FC) Eavg/Emax | ILLUMINANCE - CONE OF LIGHT | BEAM DIAMETER (FT) |
|---------------|-------------------------------|-----------------------------|--------------------|
| 3.25 | 7.70/14.65 | | 3.48 |
| 6.25 | 1.92/3.66 | | 6.96 |
| 10 | 0.88/1.67 | | 10.70 |
| 13 | 0.48/0.91 | | 13.91 |
| 16.5 | 0.31/0.59 | | 17.62 |
| 20 | 0.22/0.42 | | 21.40 |

