

Silva Low PL-SILVA-L-BK

Path Light

Product Finishes: ■



Specifications:

Voltage: 12V AC

Wattage: 1.5

Volt Amps: 2.5

Lumens: 60

Color Temp: 2700k

IP Rating: 65

CRI: 92.5

Light Source: Integrated

Material: Anodized Aluminum

Cable Length: 24"

Lux (lx): 9.7 lx

Candelas (cd): 38 cd

Rated Life: 50,000 hours


Warranty: 7-year comprehensive

Dimmable: No


Color-Changing: No

Product Uses:

Pathways, Bushes, Garden Beds, Driveways, Grasses

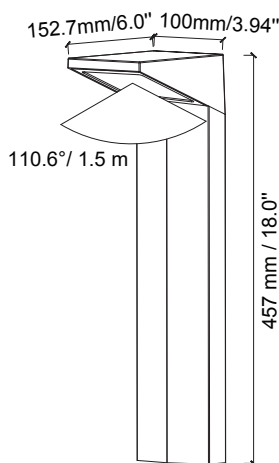

Max. Luminous intensity : 38 cd

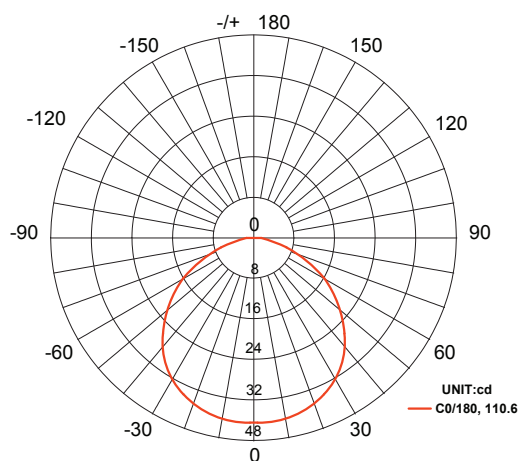

AVERAGE BEAM ANGLE (50%): 110.6 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	10.88/40.79		1.72
1.5	2.04/7.21		2.58
3	0.51/1.8		5.19
5	0.25/0.88		9.0
6.5	0.14/0.50		11.25

AVERAGE BEAM ANGLE 0/180 (50%): 110.6 DEG

