

# Cube High PL-CUBE-H-BK

Path Light

Product Finishes: ■





## Specifications:

**Voltage:** 12V AC  
**Wattage:** 1.5  
**Volt Amps:** 2.5  
**Lumens:** 60  
**Color Temp:** 2700k  
**IP Rating:** 65  
**CRI:** 93  
**Light Source:** Integrated

**Material:** Anodized aluminum  
**Cable Length:** 24"  
**Lux (lx):** 2.2 lx  
**Candelas (cd):** 8.8 cd  
**Rated Life:** 50,000 hours  
**Warranty:** 7-year comprehensive  
**Dimmable:** No  
**Color-Changing:** No

## Product Uses:

Pathways, Bushes, Garden  
 Beds, Driveways, Grasses

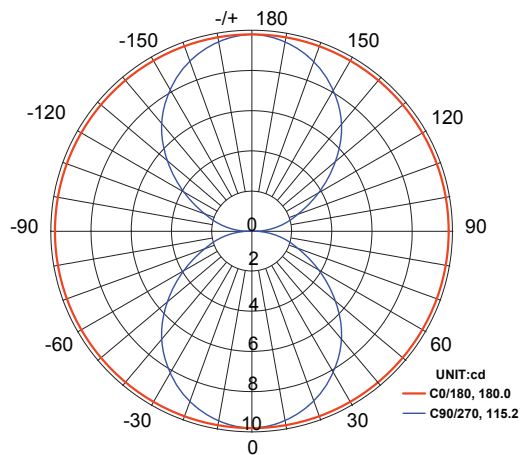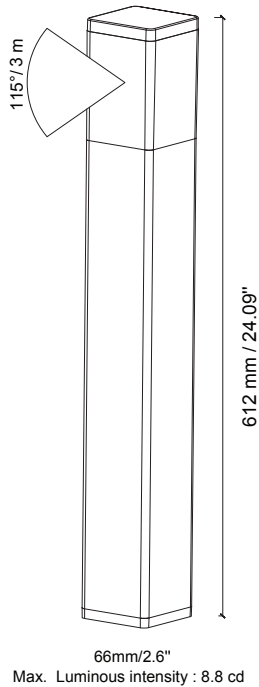

**AVERAGE BEAM ANGLE 90/270 (50%): 113 DEG**  
**AVERAGE BEAM ANGLE 0/180 (50%): 180 DEG**

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	0.41/13.6		2.22
1.5	0.08/2.58		3.30
3	0.03/1.16		5.10
5	0.02/0.72		7.33
6.5	0.01/0.31		10.73

**AVERAGE BEAM ANGLE 90/270 (50%): 113 DEG**



support@boldpros.com | 1-833-472-9960

boldpros.com