

# Ruby Square RL-RUBY-SQ-60-BK

Recessed Light

Product Finishes: ■ ■



## Specifications:

**Voltage:** 12V AC

**Wattage:** 0.4

**Volt Amps:** 0.7

**Lumens:** 16

**Color Temp:** 2700k

**IP Rating:** 67

**CRI:** 93

**Light Source:** Integrated

**Material:** Anodized aluminum

**Cable Length:** 36"

**Lux (lx):** 2.9 lx

**Candelas (cd):** 11.5 cd

**Rated Life:** 50,000 hours

**Warranty:** 7-year comprehensive

**Dimmable:** No

**Color-Changing:** No


## Product Uses:

Pavers, Decks, Stairs,


Driveways, Risers, Concrete

## Accessories:

Fang

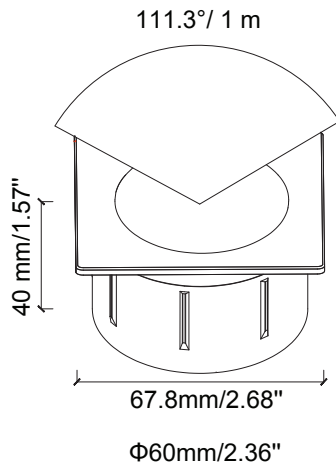

Max. Luminous intensity : 11.5 cd

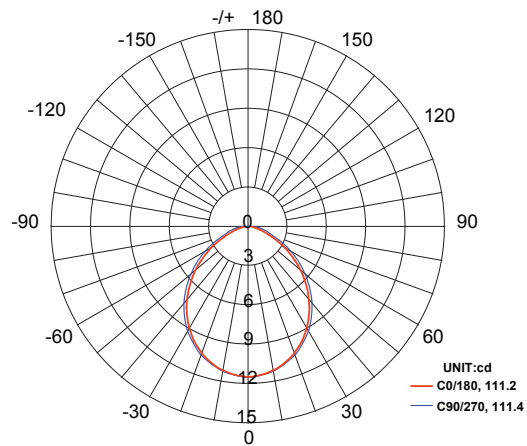

**AVERAGE BEAM ANGLE (50%): 111.3 DEG**

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	30.36/83.50		0.28
1.5	1.43/3.92		0.39
3	0.36/0.98		0.75
5	0.09/0.26		1.27
6.5	1.02 / 2.81		1.63

